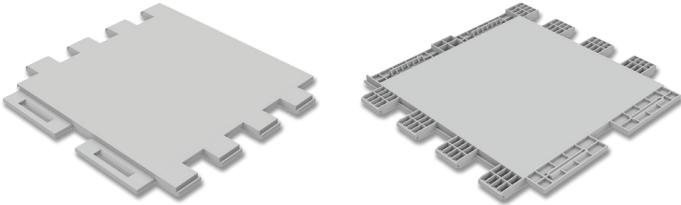



	<b>HEAVY DUTY</b> fully drivable <i>solid top/bottom</i>	<b>RAMP</b>
<b>TILE IMAGE</b>		
<b>TILE SIZE</b>	<b>ACTUAL</b> 43.3" x 43.8" x 1.6"   110cm x 111cm x 4cm <b>USABLE AREA</b> 39.4" x 39.4"   100cm x 100cm	<b>HEIGHT</b> 1.6"   4cm <b>WIDTH</b> 18.5"   47cm <b>LENGTH</b> 19.7"   50cm
<b>WEIGHT</b>	<b>HD SOLID BOTTOM</b> 30.7lbs   13.93kg	<b>OPEN BOTTOM RAMP</b> 4.6lbs   2kg
<b>WEIGHT CAPACITY</b>	<b>HD SOLID BOTTOM</b> 585 PSI	<b>OPEN BOTTOM RAMP</b> 514 PSI
<b>FLAMMABILITY</b>	ASTM E84 Class C   UL 94HB	ASTM E84 Class C   UL 94HB
<b>COLOR</b>	Translucent or Dark Gray	Translucent or Dark Gray
<b>MATERIAL</b>	High-density polyethylene with structural modifiers	
<b>DESIGN FEATURES</b>	<ul style="list-style-type: none"> <li>Translucent allows light penetration to surface below</li> <li>Toolless assembly</li> <li>Internal honeycomb structure for strength</li> <li>Includes UV inhibitors to prevent discoloration and preserve strength and flexibility in sunlight</li> <li>Tiles can withstand various climates; avoid extreme temperatures for optimal longevity</li> <li>Temperature-adaptive connection system allows expansion and contraction without affecting durability</li> <li>Drainage tiles are designed to allow air and water to flow through</li> </ul>	Meets ADA compliance requirements
<b>CONNECTION SYSTEM</b>	Interlocking flange and self-aligning	Interlocking flange panel Attach along any connection point
<b>SHIPPING INFO</b>	<ul style="list-style-type: none"> <li>54 tiles per standard pallet (581 ft<sup>2</sup>   54 m<sup>2</sup>)</li> <li>20 pallets per 40ft ISO container (11,625 ft<sup>2</sup>   1,080 m<sup>2</sup>)</li> <li>26 pallets per semi truckload (15,113 ft<sup>2</sup>   1,404 m<sup>2</sup>)</li> </ul>	